




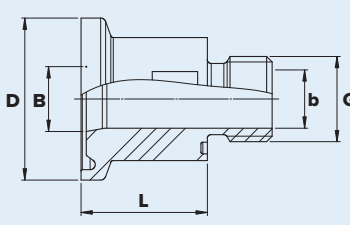


Tri-Clamp fittings

Tri-Clamp fittings are sold as a pair (incl. O-ring) / Flange gasket and clamp hinge are not included in the scope of delivery.


Article-N°	328-1421	328-1424
		
Connection (G) BSPP	G 1/4"	G 1/2"
Connection (D) in mm	D 25	D 50.5
b in mm	9	15
B in mm	10.3	29.7
L in mm	19.5	21
Wrench size	17	30
Material	1.4404 (316 L)	1.4404 (316 L)
Hygienic class	H3	H3
Standard surface (Hygienic class H3)	Inside < 0.8µm, outside < 1.6µm)	Inside < 0.8µm, outside < 1.6µm)
O-ring (FDA, USP Class VI, ADI free)	EPDM	EPDM
Standard (DIN 32676 / DIN 11866)	ISO (series B)	ISO (series B)
Inspection certificate 3.1	Available (against surcharge)	Available (against surcharge)
Scope of delivery		

Installation length incl. Tri-Clamps (in mm)

red-y smart series	L	D
GSM G1/4"	133	25
GSM G1/2"	187	50.5
GSC G1/4"	163	25
GSC G1/2"	212	50.5
GSC G1/2" double valve	228.4	50.5

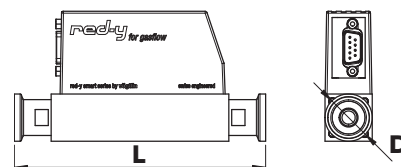

red-y industrial series	L	D
GIM G1/4"	133	25
GIM G1/2"	187	50.5
GIC G1/4"	173	25
GIC G1/2"	240	50.5

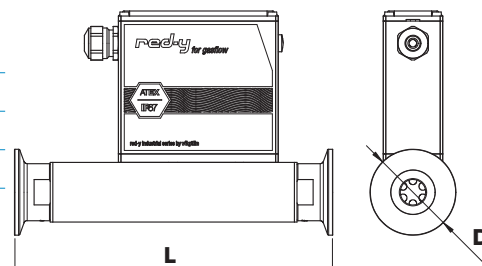

Additional versions on request

